

GUELL MICRO LED

Floodlight


Product Data Sheet

Project:

Pos.:



- housing made of die-cast aluminium
- LED 8W (total Power)
- diffuser made of hardened glass
- PG screw connection M16x1.5 for Ø5-10mm cables
- LED modules protected against overvoltage up to 500V
- external screws made of stainless steel
- mounting bracket made of painted steel
- incl. 1m cable (H05RN-F 3G1mm2)
- Country of Origin: EU

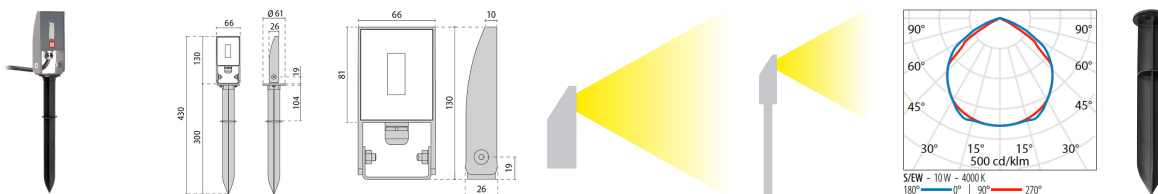

This product is available in the following versions:

Order no.	Illuminant	Description
• 50-3101178	LED 10W 230V Luminous Colour: 3000K, 611 Nlm CRI: Ra>80,	, dimensions: IP66, warranty: ,
• 50-3101179	LED 10W 230V Luminous Colour: 4000K, 634 Nlm CRI: Ra>80,	, dimensions: IP66, warranty: ,
• 50-3101182	LED 10W 230V Luminous Colour: 3000K, 611 Nlm CRI: Ra>80,	, dimensions: IP66, warranty: ,
• 50-3101183	LED 10W 230V Luminous Colour: 4000K, 634 Nlm CRI: Ra>80,	, dimensions: IP66, warranty: ,

Errors excepted - measurements may change.

ELUX Lichtsysteme GmbH
A-1230 Wien, Deutschstraße 4

Tel. 01/6154690, Fax 01/6154690-80
office@elux-licht.at

www.leuchtenshop.at
www.lichtplus.at