


# SYSTEM CYCLONE LED

## Office Suspended Light





### Product Data Sheet

Project:

Pos.:

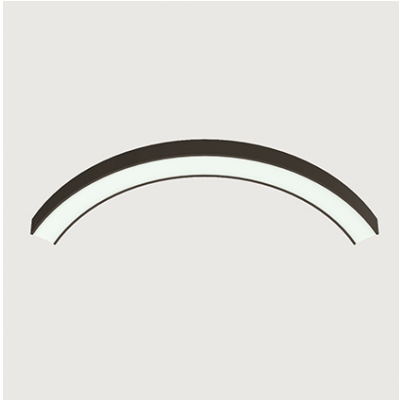


- Aluminium body
- High efficient satin cover.
- System for modular, unlimited design options
- The parts can be easily connected
- CRI>80
- High efficiency up to 168lm / W
- Available in 4 different radius and 3 straight lengths
- Wire suspension kit, ceiling rose power cable and linear joint are to be ordered separately
- Colour temperature: warm white 3000K, cool white 4000K
- Colours: x= white (1), titanium (2), black (3)
- Option: DALI-dimmable, RAL colours
- Country of Origin: EU

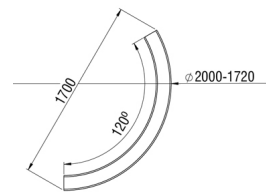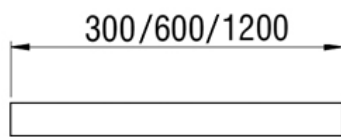


Cyclone 9/10/11


Cyclone 5

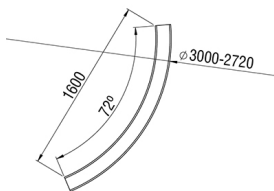

Cyclone 6



Cyclone 7



Cyclone 8



86-900114



86-90045x



86-90043x

This product is available in the following versions:

Order no.	Illuminant	Description
86-8241352x	LED 7W 230V Luminous Colour: 3000K, 1480 Blm CRI: Ra>80,	cover satine, CYCLONE 11 beam angle: direct, dimensions: 300 x 140mm, H= 120mm IP20, warranty: 5 years, incl. driver
86-8241353x	LED 7W 230V Luminous Colour: 4000K, 1480 Blm CRI: Ra>80,	cover satine, CYCLONE 11 beam angle: direct, dimensions: 300 x 140mm, H= 120mm IP20, warranty: 5 years, incl. driver

86-8241342x	LED 13W 230V Luminous Colour: 3000K, 1680 Blm CRI: Ra>80,	cover satine, CYCLONE 10 beam angle: direct, dimensions: 600 x 140mm, H= 120mm IP20, warranty: 5 years, incl. driver
86-8241343x	LED 13W 230V Luminous Colour: 4000K, 1680 Blm CRI: Ra>80,	cover satine, CYCLONE 10 beam angle: direct, dimensions: 600 x 140mm, H= 120mm IP20, warranty: 5 years, incl. driver
86-8241233x	LED 25W 230V Luminous Colour: 4000K, 3620 Blm CRI: Ra>80,	cover satine, CYCLONE 9 beam angle: direct, dimensions: 1200 x 140mm, H= 120mm IP20, warranty: 5 years, incl. driver
86-8241332x	LED 25W 230V Luminous Colour: 3000K, 3620 Blm CRI: Ra>80,	cover satine, CYCLONE 5 (Ø2000-1720mm) beam angle: direct, dimensions: 120°, L= 1700mm IP20, warranty: 5 years, incl. driver
86-8241302x	LED 40W 230V Luminous Colour: 3000K, 5800 Blm CRI: Ra>80,	cover satine, CYCLONE 6 (Ø3000-2720mm) beam angle: direct, dimensions: 72°, L= 1600mm IP20, warranty: 5 years, incl. driver
86-8241303x	LED 40W 230V Luminous Colour: 4000K, 5800 Blm CRI: Ra>80,	cover satine, CYCLONE 6 (Ø3000-2720mm) beam angle: direct, dimensions: 72°, L= 1600mm IP20, warranty: 5 years, incl. driver
86-8241312x	LED 40W 230V Luminous Colour: 3000K, 5800 Blm CRI: Ra>80,	cover satine, CYCLONE 7 (Ø4000-3720mm) beam angle: direct, dimensions: 51°, L= 1735mm IP20, warranty: 5 years, incl. driver
86-8241313x	LED 40W 230V Luminous Colour: 4000K, 5800 Blm CRI: Ra>80,	cover satine, CYCLONE 7 (Ø4000-3720mm) beam angle: direct, dimensions: 51°, L= 1735mm IP20, warranty: 5 years, incl. driver
86-8241292x	LED 43W 230V Luminous Colour: 3000K, 6230 Blm CRI: Ra>80,	cover satine, CYCLONE 5 (Ø2000-1720mm) beam angle: direct, dimensions: 120°, L= 1700mm IP20, warranty: 5 years, incl. driver
86-8241293x	LED 43W 230V Luminous Colour: 4000K, 6230 Blm CRI: Ra>80,	cover satine, CYCLONE 5 (Ø2000-1720mm) beam angle: direct, dimensions: 120°, L= 1700mm IP20, warranty: 5 years, incl. driver
86-8241322x	LED 50W 230V Luminous Colour: 3000K, 5890 Blm CRI: Ra>80,	cover satine, CYCLONE 8 (Ø5000-4720mm) beam angle: direct, dimensions: 51°, L= 2050mm IP20, warranty: 5 years, incl. driver
86-8241323x	LED 50W 230V Luminous Colour: 4000K, 5890 Blm CRI: Ra>80,	cover satine, CYCLONE 8 (Ø5000-4720mm) beam angle: direct, dimensions: 51°, L= 2050mm IP20, warranty: 5 years, incl. driver

#### Accessories for this product:

Order no.	Name	Category/Type	Description
86-900114	Accessories for CYCLONE	Single suspension	1 each segment for 5/6/7/8 and 2 for 9/10/11
86-90043x	Accessories for CYCLONE	Power feed round Ø70mm	2m transparent cable
86-90045x	Accessories for CYCLONE	Power feed square 70 x 70mm	2m transparent cable

Errors excepted - measurements may change.